

Pre-rig Lowpro 60

Truss

- Double fork connectors fixed or rotatable
- Adjustable mounting bars for conventional or moving lights
- Removeable stacking cup
- Available gates allow flexible designs
- Space saving 38cm design allows for easy fixture pack
- Ideal for Touring or any Venue
- Black painted version available

Dolly

- Allows ample working area for fixtures
- Optional spring dampening unit
- Dolly folds away & stacks
- 61 cm Dolly model makes for tighter truck pack
- Wheels on outside edges for improved stability



Code:			4LP60
Main Chords:	mm	in	56 (2 13/64")
Diagonals:	mm	in	4.8 (3/16)
Alloy:			EN AW-6061 T6
A	mm	in	558 (22")
B	mm	in	609 (24")
C	mm	in	391 (15 25/64")
D	mm	in	391 (15 25/64")
E	mm	in	1021 (40 3/16")
Connection:			Fork/Pin


Standard lengths and weights

Truss - natural finish aluminium	Code	4LP60T-L1500	4LP60T-L1800	4LP60T-L2000	4LP60T-L2400	4LP60T-L3000
Truss - black painted	Code	4LP60T-L1500BL	4LP60T-L1800BL	4LP60T-L2000BL	4LP60T-L2400BL	4LP60T-L3000BL
	m	1.50 (3' 3")	1.80 (5' 11")	2.00 (6' 7")	2.4 (7' 10")	3.0 (9' 10")
	kg	26 (57)	32 (70.5)	35 (77)	43 (94.8)	52 (114.6)


Dolly - natural finish aluminium	Code	4LP60D-L1500	4LP60D-L1800	4LP60D-L2000	4LP60D-L2400	4LP60D-L3000
	m	1.50 (3' 3")	1.80 (5' 11")	2.00 (6' 7")	2.4 (7' 10")	3.0 (9' 10")
	kg	36.5 (80.5)	44 (97)	49 (108)	58 (127.9)	73 (160.9)

Available Combination


Truss - natural finish aluminium	Code	4LP60-L1500	4LP60-L1800	4LP60-L2000	4LP60-L2400	4LP60-L3000
Dolly - natural finish aluminium	Code	4LP60-L1500BL	4LP60-L1800BL	4LP60-L2000BL	4LP60-L2400BL	4LP60-L3000BL
	m	1.50 (3' 3")	1.80 (5' 11")	2.00 (6' 7")	2.4 (7' 10")	3.0 (9' 10")

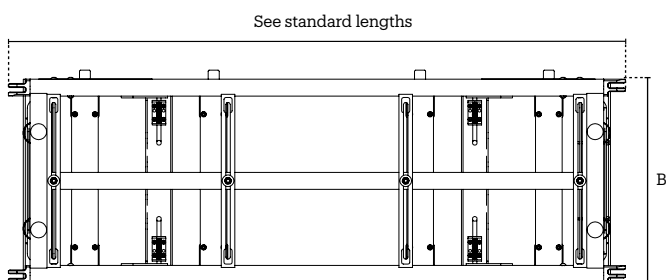


Plan view

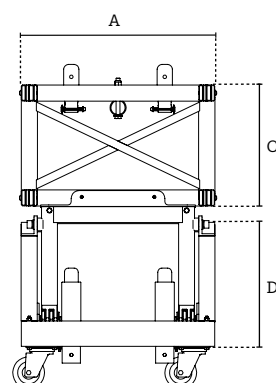

End view

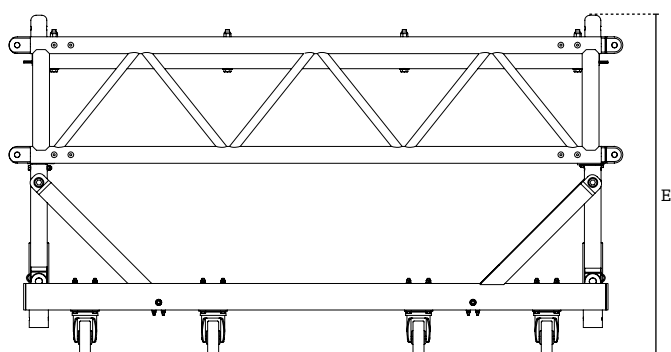

Side view
Shortest position

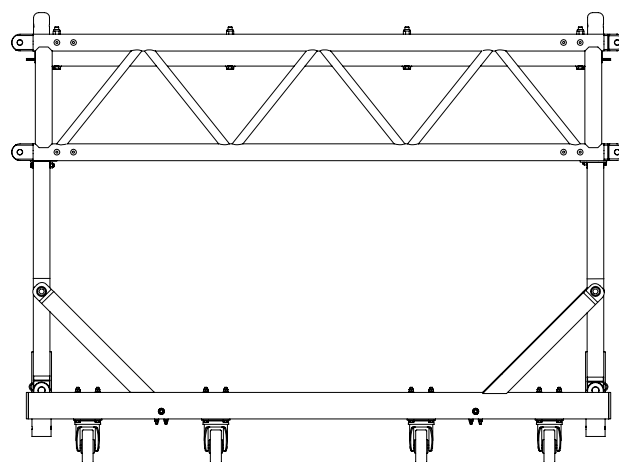

Side view
Tallest position

